
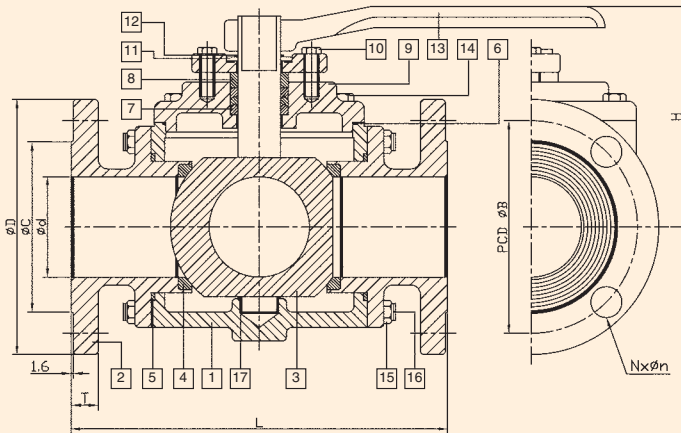


# 3-Way Stainless **OVC# 3L66F-150/3T66F-150**

## 316 Stainless Steel Ball Valve

### 3-Way Full Port Ball Valve, ANSI 150, L-Port and T-Port, Flanged Ends

Pressure/Temperature rating in accordance with ASME B 16.34. See Pressure/Temperature chart.



PORT TYPE	1	2	3	4
L	1 ⊕ 2 3	1 ⊕ 2 3	1 ⊕ 2 3	1 ⊕ 2 3
T	1 ⊕ 2 3	1 ⊕ 2 3	1 ⊕ 2 3	1 ⊕ 2 3

### Features

- ISO 9002
- The flange ends conform to ASME B 16.5
- Full port
- ANSI 150
- 15% glass fiberfill PTFE reinforced seat
- PTFE seal & packing
- Blow out proof stem
- L port and T port
- All valves tested and inspected to API-598

NO.	DESCRIPTION	MATERIAL
1	BODY	ASTM A351-CF8M ASTM A261-WCB
2	FLANGED FOR VALVE	ASTM A351-CF8M ASTM A261-WCB
3	BALL & STEM	ASTM A351-CF8M ASTM A351-CF8
4	BALL SEAT	RTFE
5	JOINT GASKET	PTFE
6	GASKET	PTFE
7	STEM PACKING	PTFE
8	GLAND	ASTM A351-CF8 ASTM A261-WCB
9	COVER	ASTM A351-CF8M ASTM A261-WCB
10	BOLT	SS 304 S45C
11	STOPPER	SS 304
12	C RETAINER RING	S45C
13	HANDLE	FCD
14	BOLT	SS 304 S45C
15	NUT	SS 304 S45C
16	STUD	SS 304 S45C
17	SLEEVE	PTFE

SIZE	d	A	B	C	D	G	H	L	T	N	n	U	P	Torque (in-lb)	Weight (lb)
6"	5.94	4.92	9.51	8.50	10.98	1.77	10.08	16.77	1.00	8	0.87	0.50	1.38	3912	165
8"	7.91	6.50	11.75	10.63	13.50	2.36	11.93	20.87	1.13	8	0.87	0.62	1.77	8000	212

Note: Actual torque values may vary. Please consult factory.

TOLL FREE (877) 423-2660 • (513) 752-5600 • FAX (513) 752-8267  
 EMAIL sales@ohiovalve.com • WEB www.ohiovalve.com